

FILTER HOUSING – AAF

DESCRIPTION

AAF filter housings have been specifically developed for high efficient removal of solid particles, water, oil aerosols, hydrocarbons, odour and vapours from compressed air ⁽¹⁾ systems. In addition, the filter housing was designed for easy installation. To meet the required compressed air quality appropriate filter or cyclone element must be installed into the housing.



APPLICATIONS ⁽²⁾

- General industrial application
- Automotive
- Electronics
- Food & Beverage
- Chemical
- Petrochemical
- Plastics
- Paint

⁽¹⁾ For any other technical gas please contact us or your local dealer

⁽²⁾ AAF filter housing can be used in a variety of applications. For applications not listed please contact us or your local dealer.

TECHNICAL SPECIFICATION

Operating temperature	1,5 - 65 °C	35 - 149 °F
Operating pressure	0 - 16 bar(g)	0 - 232 psi

MATERIALS

Housing material	Aluminium
Fittings, Screws	Brass, Brass-zinc plated, Steel
Cover	PA6
Sealing	NBR
Corrosion protection	Electrophoretic Coating (KTL)
Outside protection	Powder paint coated (Epoxy-polyester base)
Lubricant	Shell cassida grease RLS 2

SIZES

FILTER HOUSING	PIPE SIZE [inch]	FILTER ELEMENT ⁽³⁾	FLOW CAPACITY		DIMENSIONS [mm]				VOLUME [l]	WEIGHT [kg]
			[Nm ³ /h]	[scfm]	A	B	C	D		
AAF 0006	1/8	03528	10	6	105	55	14	50	0,07	0,23
AAF 0016	1/4	05528	18	11	125	55	14	70	0,09	0,24
AAF 0026	1/4	03844	25	15	145	73	18	50	0,22	0,42
AAF 0036	3/8	03844	30	18	145	73	18	50	0,22	0,42
AAF 0046	1/4	06050	35	22	189	88	32	60	0,44	0,72
AAF 0056	3/8	06050	60	35	189	88	32	60	0,45	0,71
AAF 0076	1/2	07050	78	46	189	88	32	80	0,45	0,70
AAF 0106	3/4	14050	120	70	257	88	32	150	0,64	0,78
AAF 0186	1	12075	198	116	261	125	37	160	1,4	1,9
AAF 0306	1	22075	335	197	361	125	37	250	2,0	2,4
AAF 0476	1 1/2	32075	510	300	461	125	37	350	2,6	2,6
AAF 0706	1 1/2	50075	780	459	641	125	37	530	3,6	3,5
AAF 0946	2	51090	1000	588	698	164	49	520	6,0	6,1
AAF 1506	2	76090	1500	882	944	164	49	770	8,3	8,0
AAF 1756	2 1/2	76090	1680	990	944	164	49	770	8,4	7,6
AAF 2006	3	51140	2160	1270	802	242	60	630	16,7	14,1
AAF 2406	3	75140	2760	1620	999	242	60	770	21,3	16,7

Flow capacity at 7 bar(g), 20°C

Standard is BSP pipe connection, other pipe connection on request.

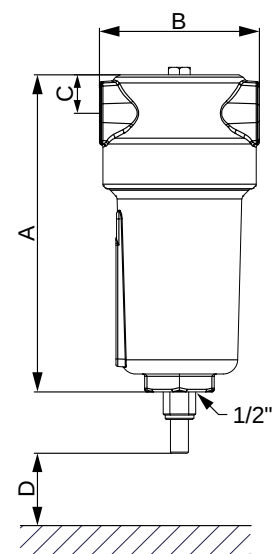
⁽³⁾ For more information about filter and cyclone elements see their product data sheet.

PRESSURE EQUIPMENT DIRECTIVE PED 2014/68/EU (Fluid group 2)

AAF 0006 - AAF 0476	Article 4.3
AAF 0706 – AAF 1756	Category 1, Module H
AAF 2006 - AAF 2406	Category 2, Module H

PRESSURE EQUIPMENT DIRECTIVE PED 2014/68/EU (Fluid group 1)⁽⁴⁾

AAF 0006 - AAF 0026	Article 4.3
AAF 0306 – AAF 0476	Category 1, Module H
AAF 0706 - AAF 1756	Category 2, Module H
AAF 2006 – AAF2406	Category 3, Module H

⁽⁴⁾ Fluid group must be specified in the order, if not standard fluid group 2 is selected.

INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE

	Our quality management system is certified by BUREAU VERITAS in conformity with ISO 9001:2015 Reg. number: SL22594Q	
--	--	--

CORRECTION FACTORS

To calculate the correct capacity of a given filter based on actual operating conditions, multiply the nominal flow capacity by the appropriate correction factor(s).

CORRECTED CAPACITY = NOMINAL FLOW CAPACITY x C_{OP}

OPERATING PRESSURE

[bar]	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
[psi]	29	44	58	72	87	100	115	130	145	160	174	189	203	218	232
C _{OP}	0,38	0,5	0,63	0,75	0,88	1	1,13	1,25	1,38	1,50	1,63	1,75	1,88	2,00	2,13

MAINTENANCE

Replace filter element at least every 12 months or follow the instructions for specific filter element. Once per year make a visual check of filter housing and make sure there is no visual damage.

INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE



Our quality management system is certified by BUREAU VERITAS in conformity with ISO 9001:2015
Reg. number: SL22594Q