

R1000

Brass high pressure regulator,
suitable for compressed air, gas and liquid



FEATURES

High pressure regulator, standard version inlet pressure up to 220 bar (3190 psi), higher pressure for special versions.

Suitable for industrial applications that require high flow rates.

Inlet and outlet connection 1" G-M.
Other connections available on request.

Outlet pressure up to 15 bar (218 psi) is controlled by a diaphragm; greater outlet pressures are controlled by a piston.
The main valve is balanced for outlet pressure up to 50 bar.

Inlet and outlet pressure gauges.

Available the EAC-EX TP TC 012/2011 versions for the Russian market.

The product complies with the directive 2014/68/EU (PED).

SPECIFICATIONS

Inlet and outlet pressure gauges: accuracy class 1.6, G 1/4 ports

Diaphragm regulator weight: ~15 kg (~33 lb)

Piston regulator weight: ~17 kg (~37 lb)

Standard version operating temperature -20 °C ÷ +60 °C (-4 °F ÷ +140 °F)

Main valve leakage classification: VI (bubble tight)

Flow coefficient: $K_v = 2.5 \text{ Nm}^3/\text{h}$ ($C_v = 2.93 \text{ US gal/min}$)

Degree of protection: IP25

Big dimension upstream filter

MATERIALS

Body and bonnet: brass

Internal parts: brass

Main valve spring: C85 (not in contact with the fluid)

Adjusting spring: C85 (not in contact with the fluid)

Diaphragm (for outlet pressure up to 15 bar): two coupled diaphragms neoprene+PTFE (PTFE in contact with the fluid)

Piston (for greater outlet pressure): brass

O-ring: EPDM or FPM according to the fluid (other compounds available on request)

Main valve gasket: PA 6.6

ACCESSORIES

Wall mounting bracket

Dome loaded version, outlet pressure to be controlled by a pilot pressure


SPARE PARTS

Gauges

Overpressure valve

Complete kit: filter cartridge, complete main valve, o-rings, assembled diaphragm

flow charts

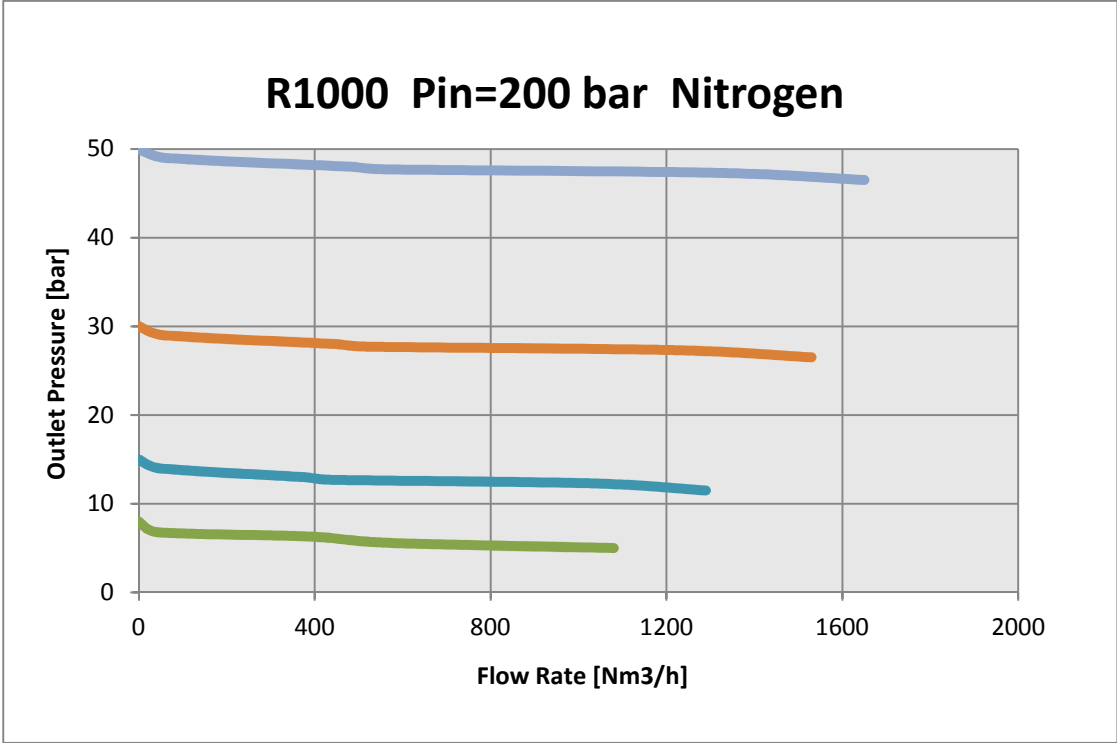

generating the product code

| R1000 IN OTTONE | | | |
|--------------------|---------------------------------------|----|------------------------------------|
| AA BB CC DD E F GG | | | |
| AA | Attacchi / Connections | R0 | G 1-M |
| BB | Pressione d'ingresso / Inlet pressure | J0 | 220 bar |
| | | L0 | 80 bar |
| CC | Intervallo d'uscita/ Outlet range | D0 | Pout 0,8 - 8 bar ^(B) |
| | | E0 | Pout 1,5 - 15 bar ^(B) |
| | | FO | Pout 3-30 bar ^(B) |
| | | G0 | Pout 5-50 bar ^(B) |
| | | V0 | Pout 20-200 bar |
| DD | Tipologia di fluido / Fluid type | 15 | O2 PED Classe III |
| | | 94 | FPM PED Classe III |
| | | 98 | EPDM |
| E | Pilotato/ Pilot operated | N | Non Pilotato |
| | | P | Pilotato |
| F | Marchiato / Marked | I | ID |
| GG | Accessori / Accessories | 00 | Nessun accessorio / No accessories |

(B): Regolatore bilanciato/Balanced regulator

CODE COMPOSITION EXAMPLE

1000# R0 J0 E0 98 N I 00

1000#: Brass regulator R1000

R0: inlet and outlet connections G 1 - M

J0: Inlet pressure 220 bar

E0: Outlet pressure 1,5-15 bar



98: EPDM gaskets

N: Not dome loaded

I: Insert Deal

00: No accessories


technical drawings (all dimensions in mm)

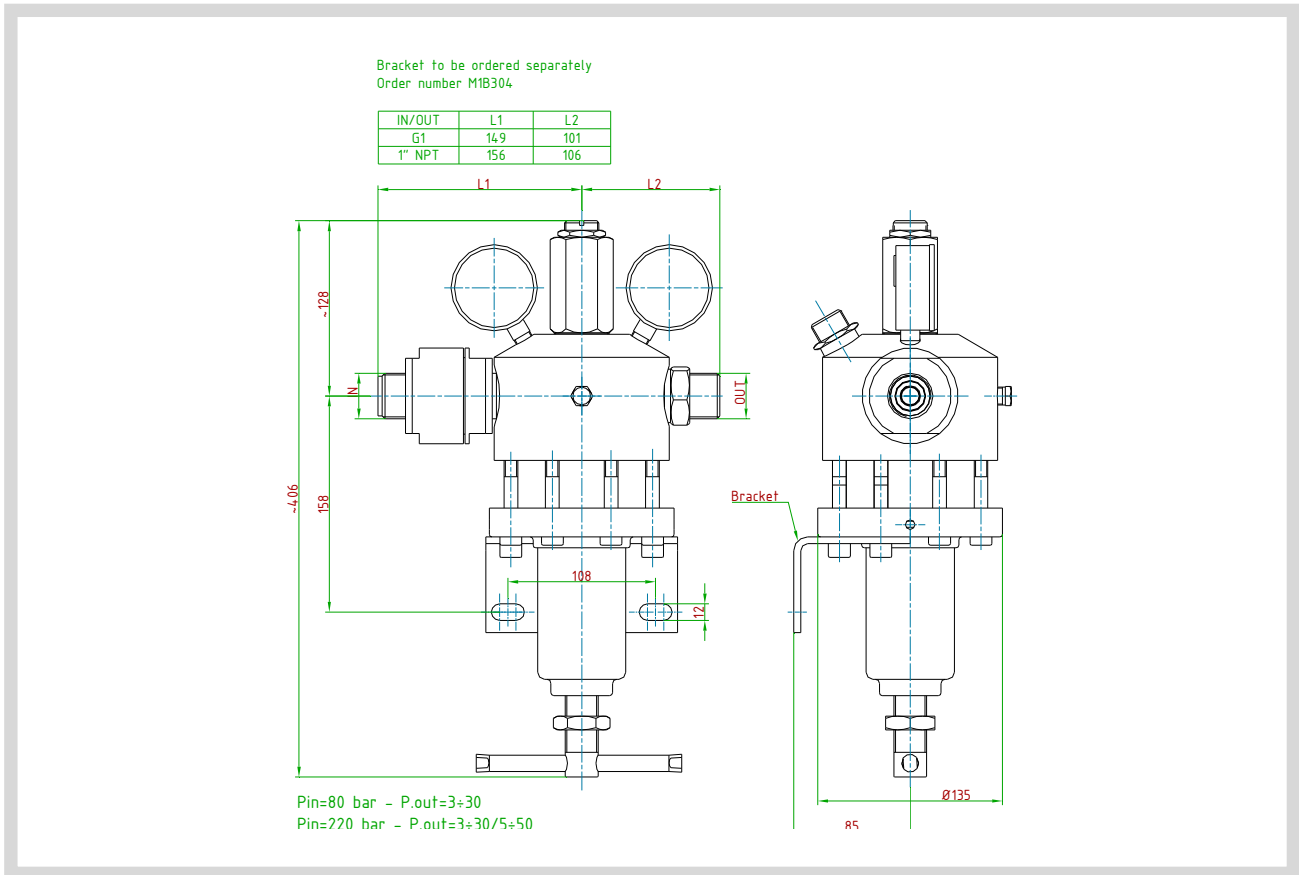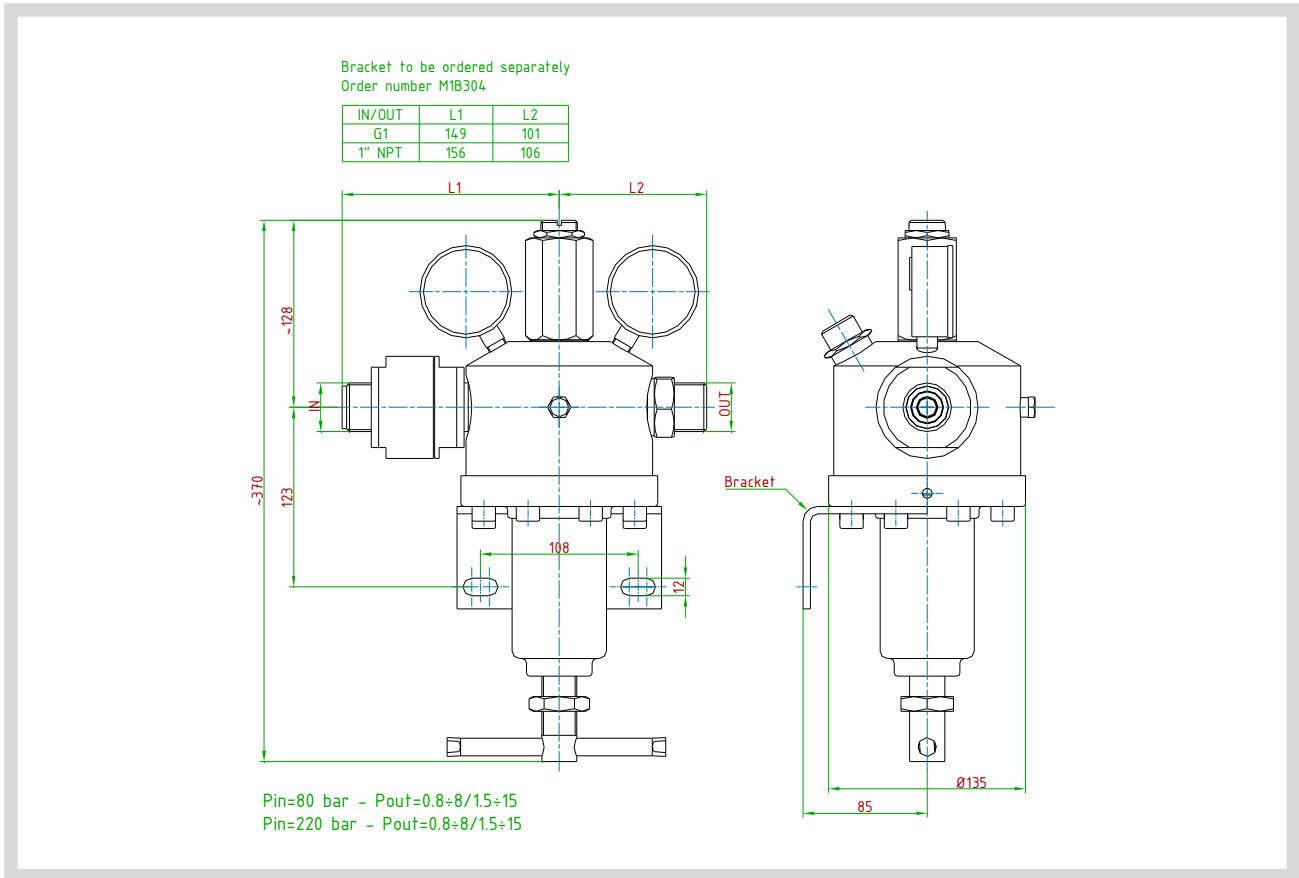

technical drawings (all dimensions in mm)

Bracket to be ordered separately
Order number M1B305

| IN/OUT | L1 | L2 |
|--------|-----|-----|
| G1 | 149 | 101 |
| 1" NPT | 156 | 106 |

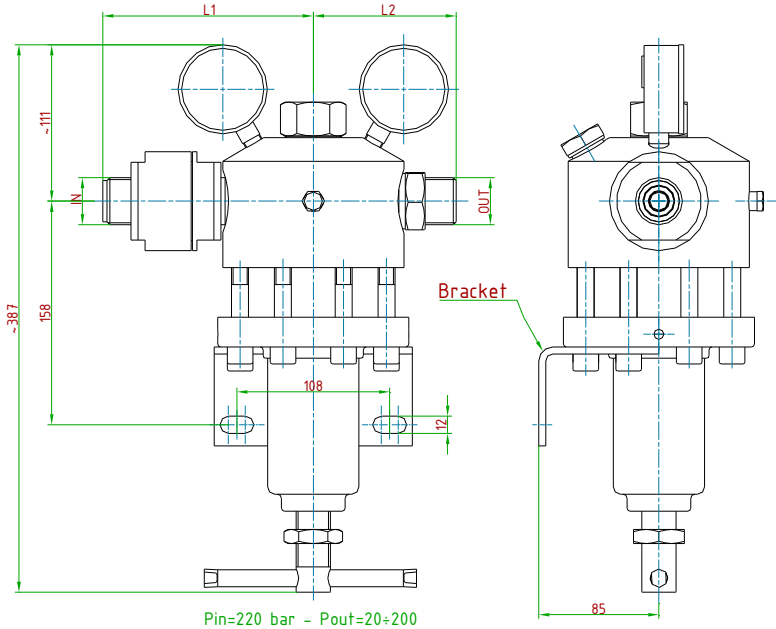

ID Insert Deal Srl

Strada dei Boschi, 40
20852 Villasanta (MB) Italia
tel. +39 039 302035
info@idinsertdeal.com
www.idinsertdeal.com

ID Insert Deal si riserva il diritto di cambiare le specifiche del prodotto senza preavviso.
ID Insert Deal reserves the right to change and/or modify product specifications without prior notice.

Insert Deal non si assume alcuna responsabilità per la scelta, uso e manutenzione di qualsiasi prodotto. La responsabilità per l'ideale scelta, uso e manutenzione di qualsiasi prodotto ID rimane interamente a carico dell'acquirente.

Insert Deal does not assume responsibility for selection, use and maintenance of any products. Responsibility for proper selection, use and maintenance of any ID products remains entirely to the purchaser.

Riproduzione vietata. Tutti i diritti riservati; nessuna parte del presente documento può essere riprodotta senza autorizzazione di ID Insert Deal Srl.
Reproduction forbidden. All rights reserved; the hereby document can't be reproduced, also partially, without the authorization of ID Insert Deal Srl.

PRESSURE REGULATOR_R1000_EN_04



Azienda con sistema di gestione qualità certificato.
certificato N° 50 100 9191
Company with certificated quality management system.
certificate N° 50 100 9191